

HALO

Design by Martin Azua.

Reference

2340.

Application

Pendants

Installation type

Surface mounted

Description

Diffuser

Acrylic diffuser

Materials


Diffuser: PMMA

Finish



2340-03 White matte lacquer (RAL 9016)

Sketch




Electrical characteristics

2 x LED STRIP 24V 15.3W

Total 30.6 W

A

VIBIA



Led 3000K CRI >80 2567 lm 85 lm/W

Fixture: 1970 lm 60 lm/W

Driver included: CC - Constant Current 120-277V 50/60Hz

Electronic dimming: 1-10V


Installation and assembly

Please see the installation manual


Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

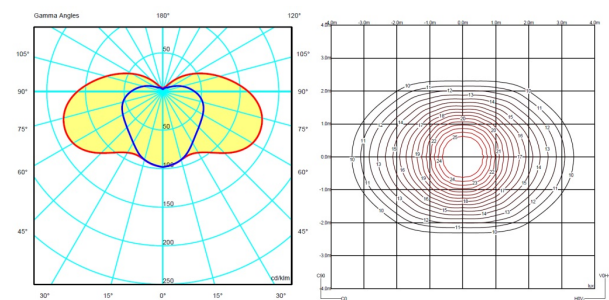

Certificates



HALO

Design by Martin Azua.

Reference

2341.

Application

Hanging lamps

Installation type

Surface

Description

HALO is a hanging lamp with three intertwined, straight pieces, which creates subtle, magical lighting. Designed by Martin Azúa. By combining different pieces you can show off hanging lights which float in the air to fit harmoniously into the room. It is available in matt white lacquer.

Diffuser

Methacrylate diffuser

Materials


Diffuser: PMMA
Ceiling rose: Steel

Finish



2341-03 Matt white lacquer (RAL 9016)

Sketch




Electrical characteristics

3 x LED STRIP 24V 15,3W

Total 45.9 W



VIBIA



Led 3000K CRI >80 3851 lm 85.57 lm/W

Fixture: 2952 lm 65.6 lm/W

Driver included: CC - Constant Current 100-240V 50/60Hz

Electronic dimming 1-10V

ficha.fichatecnicaproducto.regulacion.opcional DALI or SMART

Technical characteristics

- 1-10V Electronic dimming

Physical characteristics

2 Box / 0.25 x 0.42 x 0.42 m. / Vol. 0.0753 m³ /

Gross weight 7.3 kg. / Net weight 6.6 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 76.66%

Coordinate system : CG

Total flux : 3850.80 lm

Maximum value : 145.45 cd/klm


Light position : C=0.00 G=60.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

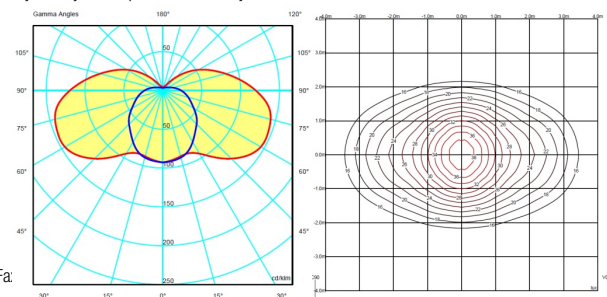

Certificates



HALO

Design by Martin Azua.

Reference

2342.

Application

Pendants

Installation type

Surface mounted

Description

Diffuser

Acrylic diffuser

Materials


Diffuser: PMMA

Finish



2342-03 White matte lacquer (RAL 9016)

Sketch




Electrical characteristics

6 x LED STRIP 24V 15.3W

Total 91.8 W

A

VIBIA



Led 3000K CRI >80 7702 lm 85 lm/W

Fixture: 5903 lm 60 lm/W

Driver included: CC - Constant Current 120-277V 50/60Hz

Electronic dimming: 1-10V


Installation and assembly

Please see the installation manual


Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

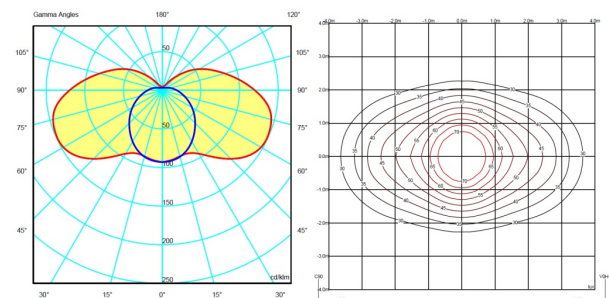

Certificates

