

Luminaire


Code 1039010A
Name DIOSCURI PAR/SOFF 140

Measurem.

Code FTS0002520
Name DIOSCURI PAR/SOFF 140

Luminaire Flux	659.58 lm	Luminaire Power	48.00 W	Efficacy	13.74 lm/W	Efficiency	89.13%
Lamps Flux	740.00 lm	Maximum value	76.32 cd/klm	Position	C=0.00 G=15.00	CG	Rotosymmetrical
Round Luminaire		Diam.	140 mm	Height	140 mm		
Round Luminous Area		Diam.	140 mm	Height	140 mm		
Horizontal Luminous Area		0.015394 m2		Emitting area on Plane 180°		0.019600 m2	
Emitting area on Plane 0°		0.019600 m2		Emitting area on Plane 270°		0.019600 m2	
Emitting area on Plane 90°		0.019600 m2		Glare area at 76°		0.022742 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		16-05-2000		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		740.00 lm	
66748 ECO							
C.I.E.	25 50 75 53 89			D DIN 5040	C11		
F UTE	0.48 J + 0.42 T			B NBN	BZ 8		


Diam=140mm



Semipiani C

180.0 ——— 0.0

ULOR 41.57 %
DLOR 47.56 %
RN 46.64 %

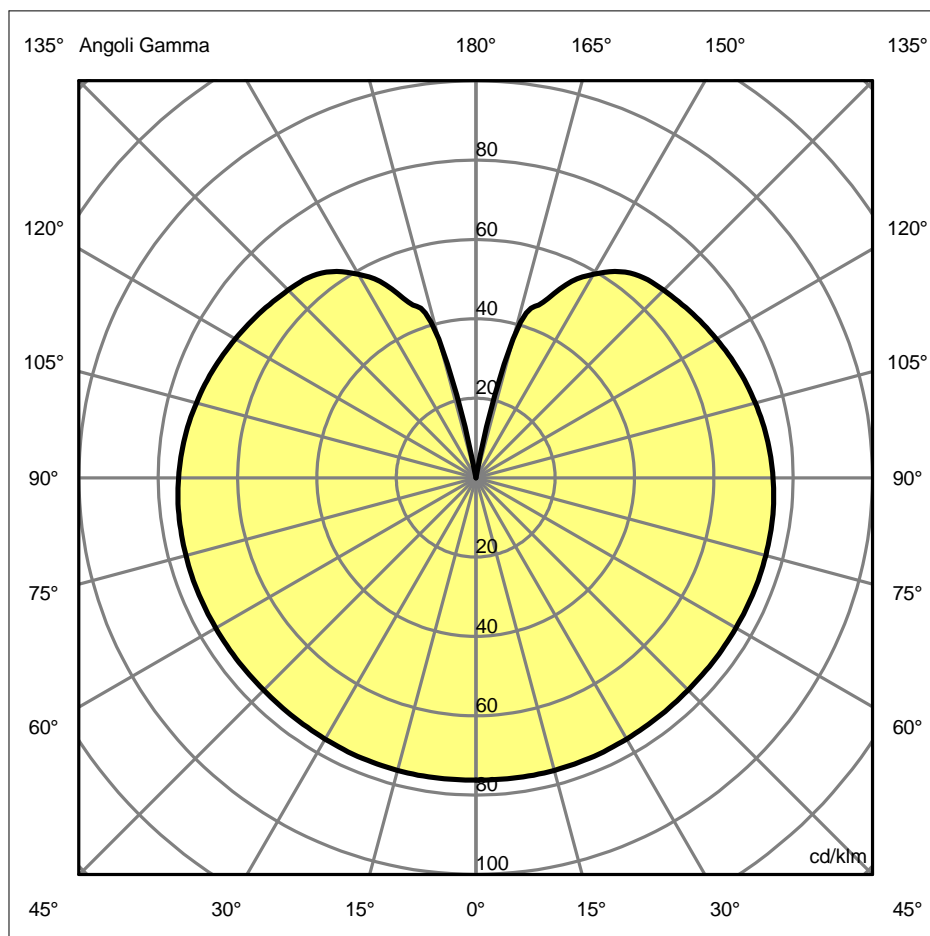

Luminaire

Code 1039010A
Name DIOSCURI PAR/SOFF 140

Measur.

Code FTS0002520
Name DIOSCURI PAR/SOFF 140

Luminaire Flux	659.58 lm	Luminaire Power	48.00 W	Efficacy	13.74 lm/W	Efficiency	89.13%
Lamps Flux	740.00 lm	Maximum value	76.32 cd/klm	Position	C=0.00 G=15.00	CG	Rotosymmetrical
Round Luminaire		Diam.	140 mm	Height	140 mm		
Round Luminous Area		Diam.	140 mm	Height	140 mm		
Horizontal Luminous Area		0.015394 m2		Emitting area on Plane 180°		0.019600 m2	
Emitting area on Plane 0°		0.019600 m2		Emitting area on Plane 270°		0.019600 m2	
Emitting area on Plane 90°		0.019600 m2		Glare area at 76°		0.022742 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		16-05-2000		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		740.00 lm	
66748 ECO							
C.I.E.	25 50 75 53 89			D DIN 5040	C11		
F UTE	0.48 J + 0.42 T			B NBN	BZ 8		

Apertura a destra non trovata, gamma =12

Apertura a destra non trovata, gamma =12

Luminaire

Code 1039010A
Name DIOSCURI PAR/SOFF 140

Measur.

Code FTS0002520
Name DIOSCURI PAR/SOFF 140

Luminaire Flux	659.58 lm	Luminaire Power	48.00 W	Efficacy	13.74 lm/W	Efficiency	89.13%
Lamps Flux	740.00 lm	Maximum value	76.32 cd/klm	Position	C=0.00 G=15.00	CG	Rotosymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	11.9	12.9	12.8	13.8	14.9	11.9	12.9	12.8	13.8	14.9
x=2H y=3H	14.5	15.4	15.4	16.3	17.5	14.5	15.4	15.4	16.3	17.5
x=2H y=4H	15.8	16.7	16.7	17.6	18.8	15.8	16.7	16.7	17.6	18.8
x=2H y=6H	17.2	18.0	18.1	18.9	20.1	17.2	18.0	18.1	18.9	20.1
x=2H y=8H	17.8	18.6	18.8	19.5	20.8	17.8	18.6	18.8	19.5	20.8
x=2H y=12H	18.5	19.2	19.4	20.2	21.4	18.5	19.2	19.4	20.2	21.4
x=4H y=2H	12.9	13.7	13.8	14.6	15.8	12.9	13.7	13.8	14.6	15.8
x=4H y=3H	15.6	16.3	16.5	17.3	18.5	15.6	16.3	16.5	17.3	18.5
x=4H y=4H	17.1	17.7	18.0	18.7	19.9	17.1	17.7	18.0	18.7	19.9
x=4H y=6H	18.5	19.1	19.5	20.1	21.4	18.5	19.1	19.5	20.1	21.4
x=4H y=8H	19.3	19.8	20.3	20.8	22.1	19.3	19.8	20.3	20.8	22.1
x=4H y=12H	20.0	20.5	21.0	21.5	22.8	20.0	20.5	21.0	21.5	22.8
x=8H y=4H	17.6	18.2	18.6	19.2	20.4	17.6	18.2	18.6	19.2	20.4
x=8H y=6H	19.4	19.8	20.4	20.8	22.1	19.4	19.8	20.4	20.8	22.1
x=8H y=8H	20.3	20.7	21.3	21.7	23.0	20.3	20.7	21.3	21.7	23.0
x=8H y=12H	21.2	21.5	22.2	22.6	23.9	21.2	21.5	22.2	22.6	23.9
x=12H y=4H	17.8	18.3	18.7	19.3	20.5	17.8	18.3	18.7	19.3	20.5
x=12H y=6H	19.6	20.0	20.6	21.0	22.3	19.6	20.0	20.6	21.0	22.3
x=12H y=8H	20.6	20.9	21.6	21.9	23.3	20.6	20.9	21.6	21.9	23.3